


COMEX – FRIGG R6 AI – 82x24mm

Dry inlay

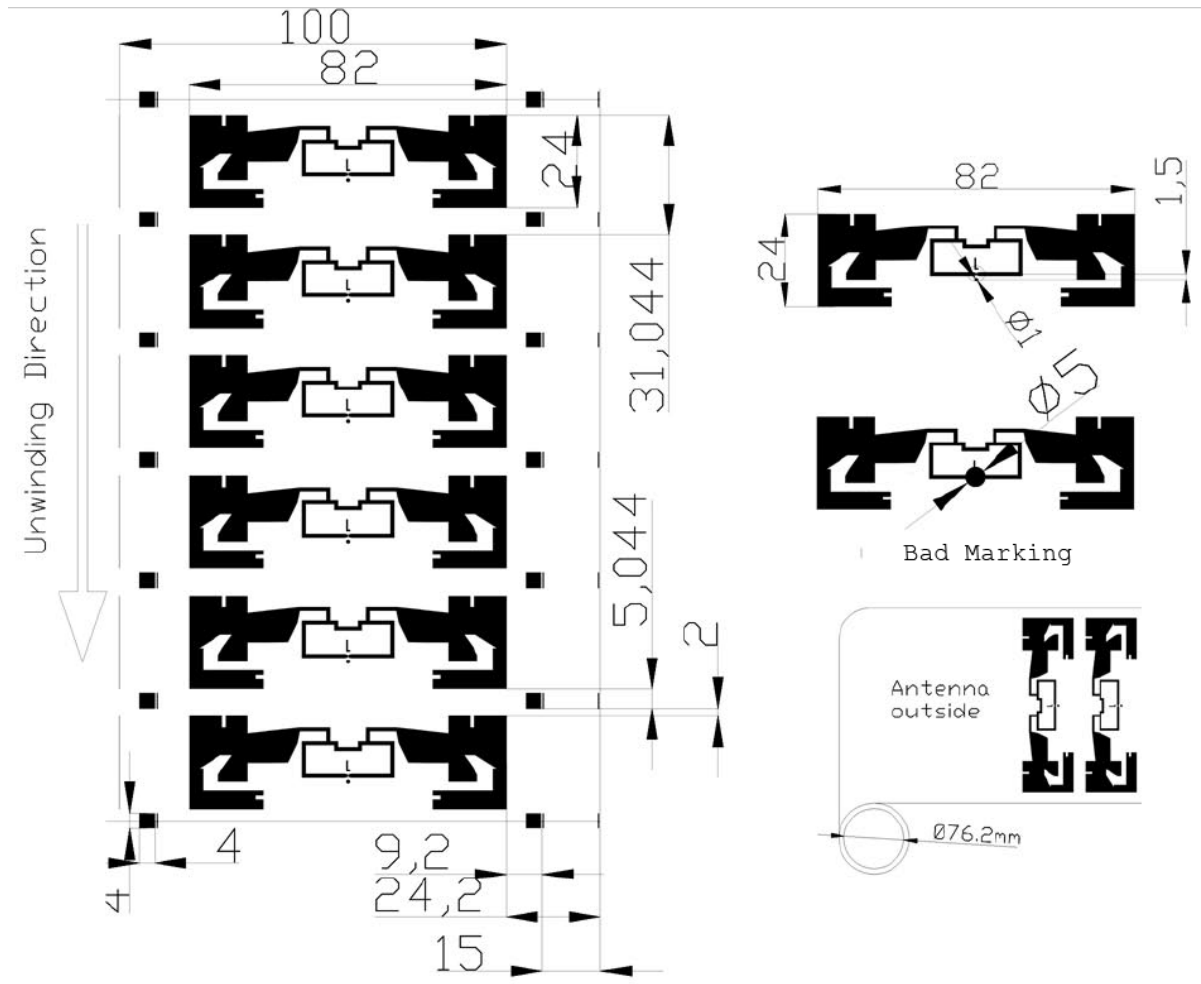

Inlay specification

Antenna width:	82 (± 0,2) mm
Antenna length:	24 (± 0,2) mm
Web width:	100 (± 1) mm
Pitch length per piece:	5 (± 0,1) mm
Minimum size of register mark:	4,2x4 mm (width x length)
Tag antenna material:	aluminum
Inlay substrate material:	PET

Roll format

Real core inner diameter: 76 mm (3")
Wind direction: Out
Inlays per roll: 10 000 pcs
Quality audit: 100%, bad ones marked

RFID

Supported Protocols: EPC Class 1 Gen 2 compliant, ISO/IEC 18000-6C
Integrated Circuit (IC): NXP UCODE7
EPC memory: 128-bits

Environmental

Shelf life: 2 years, +20°C, 40%RH
Operation temperature: -40°C to +80°C (20% to 90% RH)



PPU Comex Ltd.
54-516 Wrocław
ul. Graniczna 21
Poland
tel. +48 71 373 75 79, 354 58 79
fax +48 71 373 75 78

e-mail: rfid@comex.net.pl

*Unprotected inlays are sensitive to ESD. Keep environmental static charge to a minimum.
Comex reserves the right to change product specifications and services at any time without notice.*