


RFID.ON. label

Product specification:

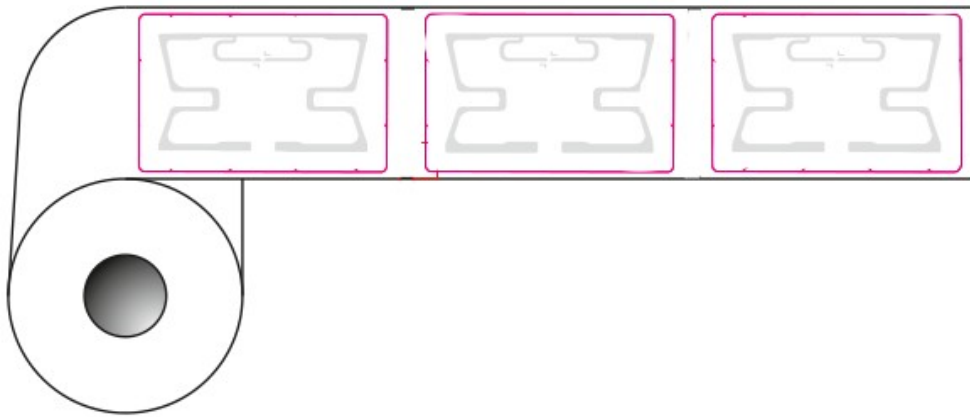

Mechanical dimensions

Antenna width	26,5mm
Antenna length	46,2mm
Die-cut width	50mm
Die-cut length	80mm
Tag antenna material	Silver paste
Pitch	5mm


Electrical characteristics

Integrated Circuit	NXP G2iL
IC's protocol	EPC Class 1 Gen 2
Operation frequency	860-960 MHz
EPC memory	128 bit

General characteristics of transponder

Operating temperature	-40 °C up to +85 °C
ESD voltage immunity	+ - 2kV
READ sensitivity	-18dBm

Structure

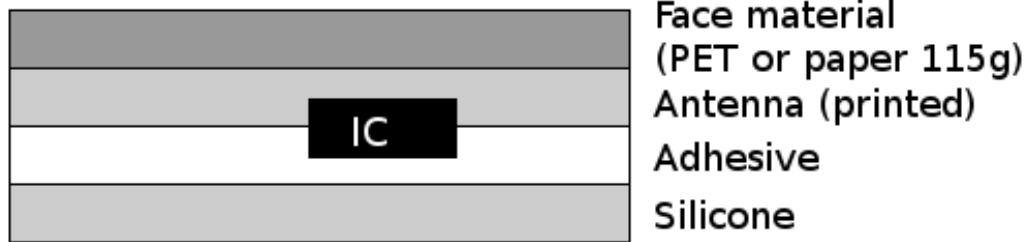

Delivery details

Appearance	Single row reel form
Reel core	Card board core, inner diameter 76mm
Winding of the reel	Face out

PPU COMEX reserves the right to change its products and services at any time without notice.

Update date 18/07/2012

Version 1.0