


# **Document tamperproof label**

## **Product specification:**

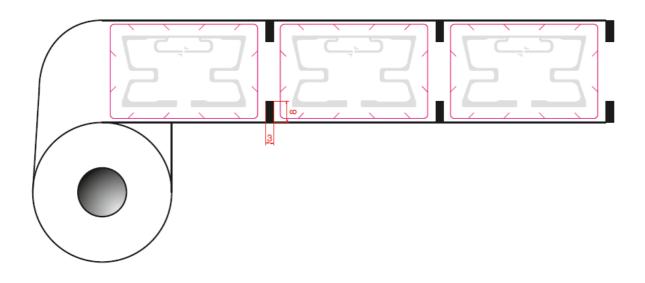

### **Mechanical dimensions**

Antenna width	26,5mm
Antenna length	46,2mm
Die-cut width	35mm
Die-cut length	55mm
Tag antenna material	Silver paste
Pitch	8mm
Register mark	3x8mm printed on the bottom side of silicon liner


#### **Electrical characteristics**

Integrated Circuit	NXP G2iL
IC's protocol	EPC Class 1 Gen 2
Operation frequency	860-960 MHz
EPC memory	128 bit

**General characteristics of transponder** 

Operating temperature	-40 °C up to +85 °C	
ESD voltage immunity	± 2kV	
READ sensitivity	-18dBm	

#### **Structure**

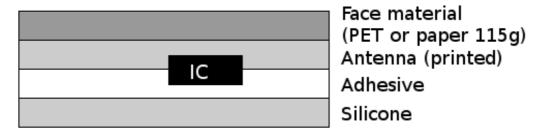

**Delivery details** 

Appearance	Single row reel form	
Reel core	Card board core, inner diameter 76mm	
Winding of the reel	Face out	

PPU COMEX reserves the right to change its products and services at any time without notice.

Update date 18/07/2012 Version 1.0