

The Kathrein RRU 4000 reader family is the next generation of RAIN RFID reader and the leading IoT device for all professional AutoID solutions.

With its best in class 33 dBm UHF RF unit, connectivity interface PoE+, 3G mobile interface and the powerful scalable processing unit. The way how identification works will be changed.

Base on the latest RFID standards like EPC Gen2v2 / ISO 18000-63 Kathrein RRU 4000 series supporting all market leading transponder chip features for security, authentication and encoding.



## RRU 4570 Reader Unit

### > Features

Type	ETSI Version RRU 4570	FCC Version RRU 4570
Order No.	52010290	52010298
<b>Embedded PC</b>		
Processor	ARMv7-A based processor, 2 cores @ 800 MHz	
Flash memory (eMMC)	[Gbyte]	8
RAM DDR3	[Gbyte]	1
Operating system	Linux	
<b>Ethernet</b>		
Number of Ethernet ports	2	
Data rate	[Mbit/s]	10/100
Connector	M12, X-coded, 8-pole	
<b>©KRAI</b>		
TX Frequency	[kHz]	22
Supply voltage (output)	[V]	5
Max. current per port	[mA]	100
<b>LED visualisation</b>		
Freely programmable	high-end LED	
<b>2G/3G</b>		
Frequency range GSM/ GPRS/ EDGE	[MHz]	850/ 900/ 1800/ 1900
Frequency range UMTS/ HSPA	[MHz]	800/ 850/ 900/ 1900/ 2100
Max. TX power (dependent on class and modulation)	[dBm]	33


**> General Specifications**

Type		ETSI Version RRU 4570	FCC Version RRU 4570
Order No.		52010290	52010298
<b>RFID</b>			
Frequency range	[MHz]	865 - 868	902 - 928
Impedance antenna port	[Ohm]	50	
Max. TX power conducted	[dBm]	33	30 (33 dBm with extended cable length)
Max. TX power radiated	[ERP (ETSI)/ EIRP (FCC)]	33	36
RX sensitivity	[dBm]	typ. -80	
Number of antenna ports	[R-TNC]	4	
<b>Voltage</b>			
In situ	[VDC]	+10 to +30	
Connector		M12, A-coded, 4-pole	
Remote-fed	[VDC]	PoE+ according to 802.3at (10-57) (internal supply of GPIO-VCC-Pin not possible with PoE+)	
Connector		M12, X-coded, 8-pole, port 1 only	
<b>Power consumption</b>			
In situ	[W]	25.4	
Remote-fed	[W]	25.4	
<b>GPIO</b>			
Max. input voltage	[V]	30	
Max. output voltage	[V]	30	
Max. current per output port	[mA]	500	
Max. current over all outputs	[mA]	1500	
Connector		M12, A-coded, 12-pole	
<b>RFID controller</b>			
Processor		ARMv7-A based processor with 600 MHz	
Flash memory eMMC	[Gbyte]	4	
RAM DDR2	[Mbyte]	128	
Operating system		Linux	
Weight	[kg]	4.00	
Degree of protection		IP67	
Operating temperature range	[°C]	-20 to +55	
Storage temperature range	[°C]	-40 to +85	
Dimensions (L x W x H)	[mm]	300 x 300 x 71	
Standards		EN302208-2 V2.1.1, EN301489-3, EN50364, EN62368-1, EN60529, EPC Gen2 V2, UCODE DNA	FCC Part15, UL, IC, EPC Gen2 V2, UCODE DNA

**Key Application**

- Logistics
- Industry Automation
- Vehicle Identification
- Smart City Applications


➤ **Dimensions [mm]**

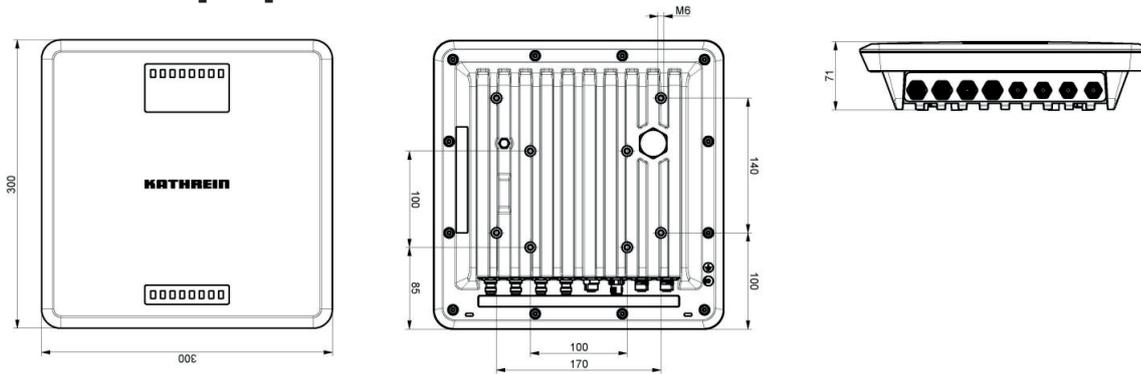

➤ **Power supply**

M12, A-coded, 4 pin, male

Pinout power supply




Pin	Allocation
1	+24 V DC
2	GND
3	GND
4	+24 V DC

➤ **Ethernet**

M12, X-coded, 8 pin, female

Pinout communication PoE+

Pinout communication LAN

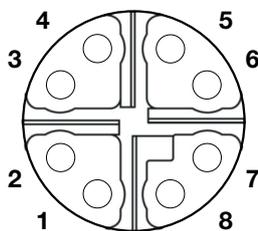


Pin	Allocation
1	TX+ / PoE+1
2	TX- / PoE+1
3	RX+ / PoE+2
4	RX- / PoE+2
5	PoE+1
6	PoE+1
7	PoE+2
8	PoE+2

Pin	Allocation
1	TX+
2	TX-
3	RX+
4	RX-
5	
6	
7	
8	

➤ **GPIO**

M12, A-coded, 12 pin, female

Pinout general purpose input output:



Pin	Allocation
1	OUT_CMN
2	OUTPUT_0
3	INPUT_2
4	INPUT_CMN
5	INPUT_0
6	GND
7	UB
8	OUTPUT_3
9	OUTPUT_2
10	OUTPUT_1
11	INPUT_1
12	INPUT_3